

(12)

(21) 2 359 051

(51) Int. Cl. 7: **F23Q 7/22**

(22) 10.02.2000

(85) 29.06.2001

(86) PCT/US00/03450

(87) WO00/49340

(30) 09/253,376 US 19.02.1999

(71) SAINT-GOBAIN CERAMICS AND PLASTICS, INC.,  
1 New Bond Street  
Box Number 15138, WORCESTER, XX (US).

SHUM, DAVID (US).  
KOCHAN, BRIAN S. (US).  
NAGY, BELA (US).  
COOPER, JOHN (US).  
HAMEL, SCOTT M. (US).

(72)


(74) GOWLING LAFLEUR HENDERSON LLP

(54) ALLUMEUR EN CERAMIQUE SANS SOUDURE DOTE D'UN ORGANE DE FIXATION A UN CHASSIS DE MONTAGE

(54) SOLDERLESS CERAMIC IGNITER HAVING A LEADFRAME ATTACHMENT

(57)

<sup>222</sup>An electrical connection for a ceramic hot surface element in which the ends <sup>2</sup>of the hot surface element are essentially interference fit within a pair of <sup>2</sup>metallic termination sleeves, and electrical connection to the hot surface <sup>2</sup>element is provided by an active metal braze which is directly chemically <sup>2</sup>bonded to the metallic termination.<sup>2</sup>

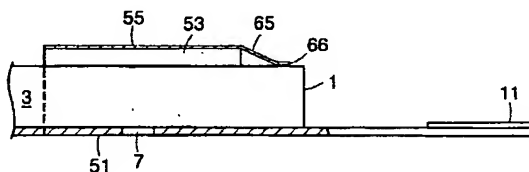




(12) DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2000/02/10  
(87) Date publication PCT/PCT Publication Date: 2000/08/24  
(85) Entrée phase nationale/National Entry: 2001/06/29  
(86) N° demande PCT/PCT Application No.: US 00/03450  
(87) N° publication PCT/PCT Publication No.: WO 00/49340  
(30) Priorité/Priority: 1999/02/19 (09/253,376) US

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> F23Q 7/22  
(71) Demandeur/Applicant:  
SAINT-GOBAIN CERAMICS AND PLASTICS, INC., US  
(72) Inventeurs/Inventors:  
HAMEL, SCOTT M., US;  
KOCHAN, BRIAN S., US;  
COOPER, JOHN, US;  
SHUM, DAVID, US;  
NAGY, BELA, US  
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : ALLUMEUR EN CERAMIQUE SANS SOUDURE DOTE D'UN ORGANE DE FIXATION A UN CHASSIS DE MONTAGE  
(54) Title: SOLDERLESS CERAMIC IGNITER HAVING A LEADFRAME ATTACHMENT

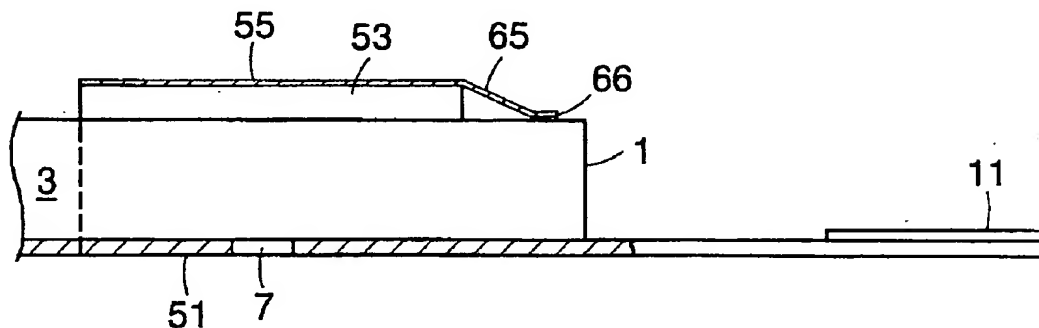

(57) Abrégé/Abstract:

An electrical connection for a ceramic hot surface element in which the ends of the hot surface element are essentially interference fit within a pair of metallic termination sleeves, and electrical connection to the hot surface element is provided by an active metal braze which is directly chemically bonded to the metallic termination.

